
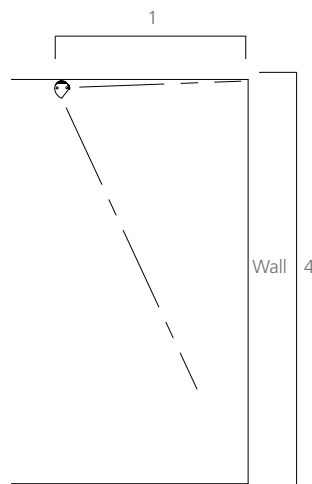


- Better than 2:1 uniformity
- Fantastic, even wall and ceiling lighting
- 700mA operation for high output
- Unique lens design
- Luxeon® K2 LEDs
- Special options for up to 60°C ambient

This new linear LED system provides the benchmark of interior LED wall washing, with a superb even wall illuminance of 2:1. The specially designed optics, married to the carefully shaped extruded section, gives a stunning, even wash of light from a very small profile. The system can be operated at either 350 or 700mA, the fluted extrusion design providing good thermal control to ensure the rated LED life.




The unique optical design means that mounting ratios of 4:1 are possible.

CLWW Module

Material	Aluminium alloy
Finish	Clear anodised
LED	350mA or 700mA Luxeon® K2
Cable Length	3 metres
Power Supply	See page 59
Options	Single colour only

Module lengths - number of LEDs

Length	CLWW Single colour
600	9
1200	12

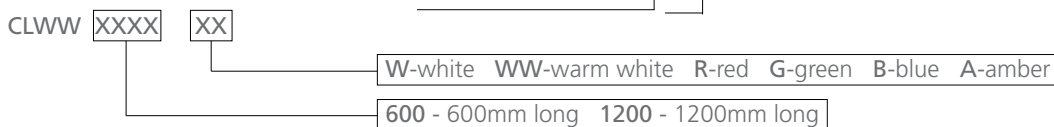

Example: **CLWW1200R** is a CL Wall Wash module, 1200mm long, with red LED's, for interior use.

For drivers, connectors and control options see page 59.
For typical wiring arrangements see page 61.